


### CURVE E DATI DI PRESTAZIONE / CURVES AND PERFORMANCE DATA

**n= 2900 1/min**

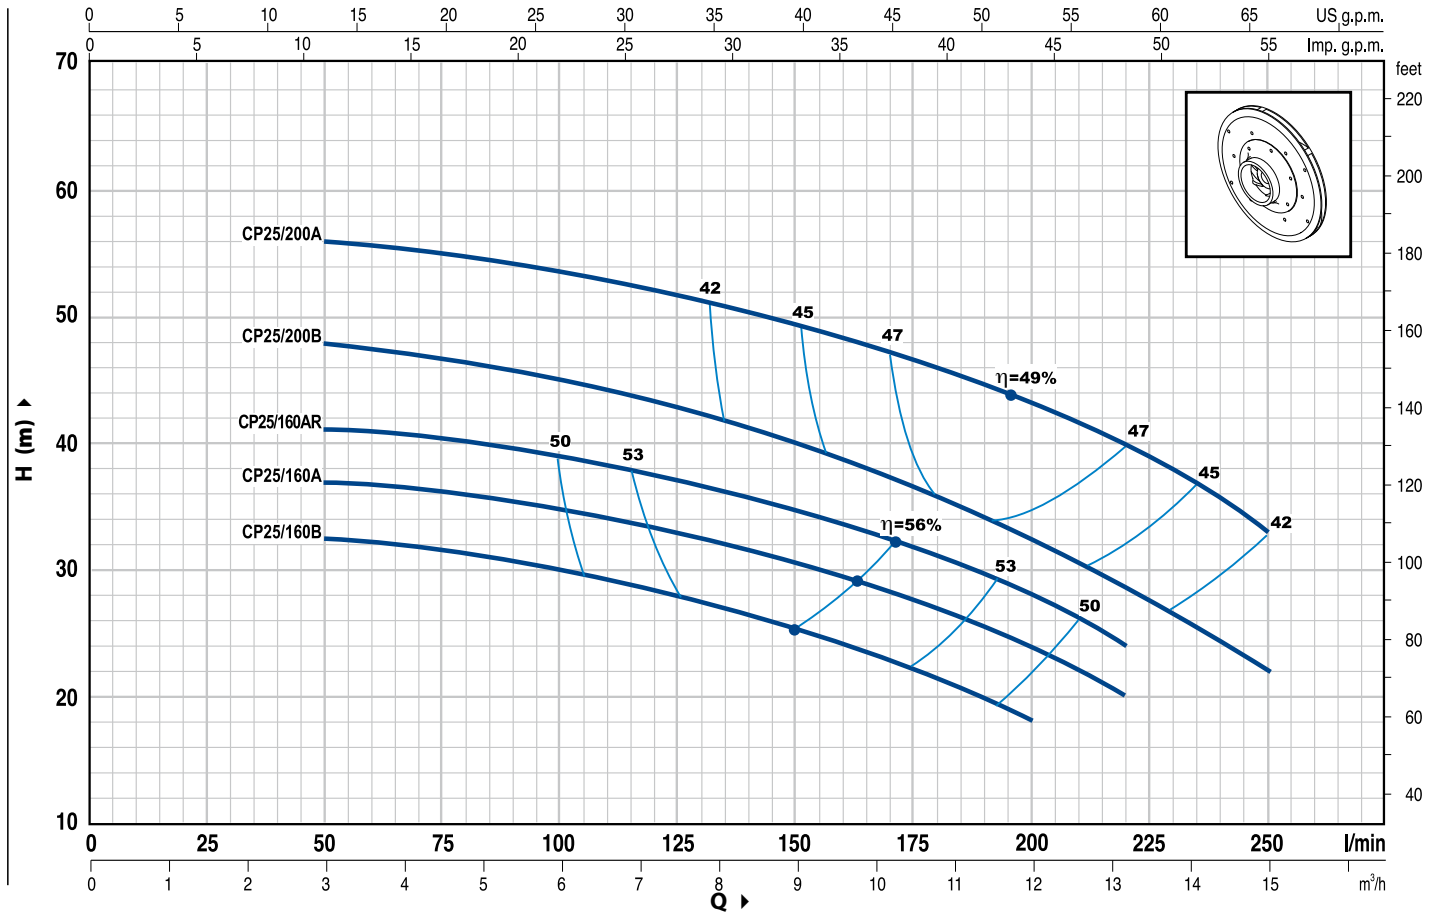


MODELLO TYPE		POTENZA POWER		Q	Q															
1 ~	3 ~	kW	HP		m³/h	0	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.5	8.4	9.6	10.8	12.0	13.2	15.0
				l/min	0	50	60	70	80	90	100	110	125	140	160	180	200	220	250	
CPm 25/160B	CP 25/160B	1.1	1.5	H (m)	33	32.5	32	31.5	31	30.5	30	29	28	26.5	24	21.5	18			
CPm 25/160A	CP 25/160A	1.5	2		38	37	36.8	36.5	36	35.5	35	34	33	31.5	29.5	27	24	20		
—	CP 25/160AR	2.2	3		42	41	41	40.5	40	39.5	39	38	37	36	34	31	28	24		
CPm 25/200B	CP 25/200B	2.2	3		49	48	47.5	47	46.5	45.5	45	44	43	41	38.5	36	32	28	22	
—	CP 25/200A	3	4		57	56	55.8	55.5	55	54.5	53.5	53	52	50.5	48.5	46	43.5	40	33	

Q = Portata H = Prevalenza manometrica totale  
Q = Flow rate H = Total manometric head

Tolleranza delle curve di prestazione secondo EN ISO 9906 App. A.  
Tolerance of the performance curves according to EN ISO 9906 App. A.App. A.

**DIMENSIONI E PESI / DIMENSIONS AND WEIGHTS**

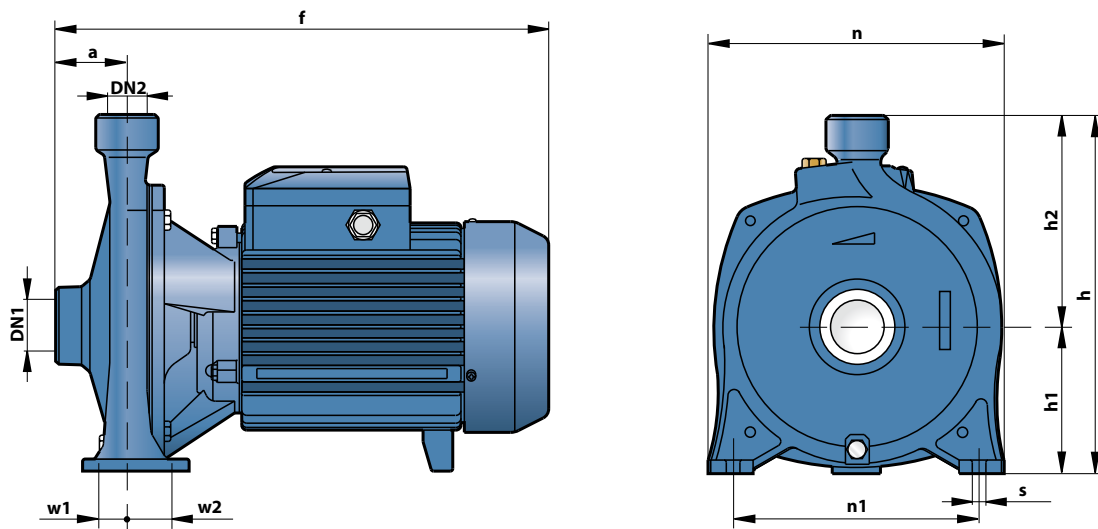

TIPO TYPE		BOCCHIE PORTS		DIMENSIONI mm DIMENSIONS mm										kg	
1~	3~	DN1	DN2	a	f	h	h1	h2	n	n1	w1	w2	s	1~	3~
<b>CPm 25/160B</b>	<b>CP 25/160B</b>	1 1/2"	1"	56	375	260	105	155	206	150	27.5	27.5	10	<b>20.0</b>	<b>18.0</b>
<b>CPm 25/160A</b>	<b>CP 25/160A</b>													<b>21.3</b>	<b>21.3</b>
—	<b>CP 25/160AR</b>													—	<b>21.3</b>
<b>CPm 25/200B</b>	<b>CP 25/200B</b>			60	390/365	305	125	180	252	210	23.5	39.5	11	<b>28.5</b>	<b>30.7</b>
—	<b>CP 25/200A</b>	390	—		<b>30.9</b>										

- Corpo pompa: ghisa
- Girante: ottone

- Pump body: cast iron
- Impeller: brass