


CURVE E DATI DI PRESTAZIONE / CURVES AND PERFORMANCE DATA

n= 2900 1/min

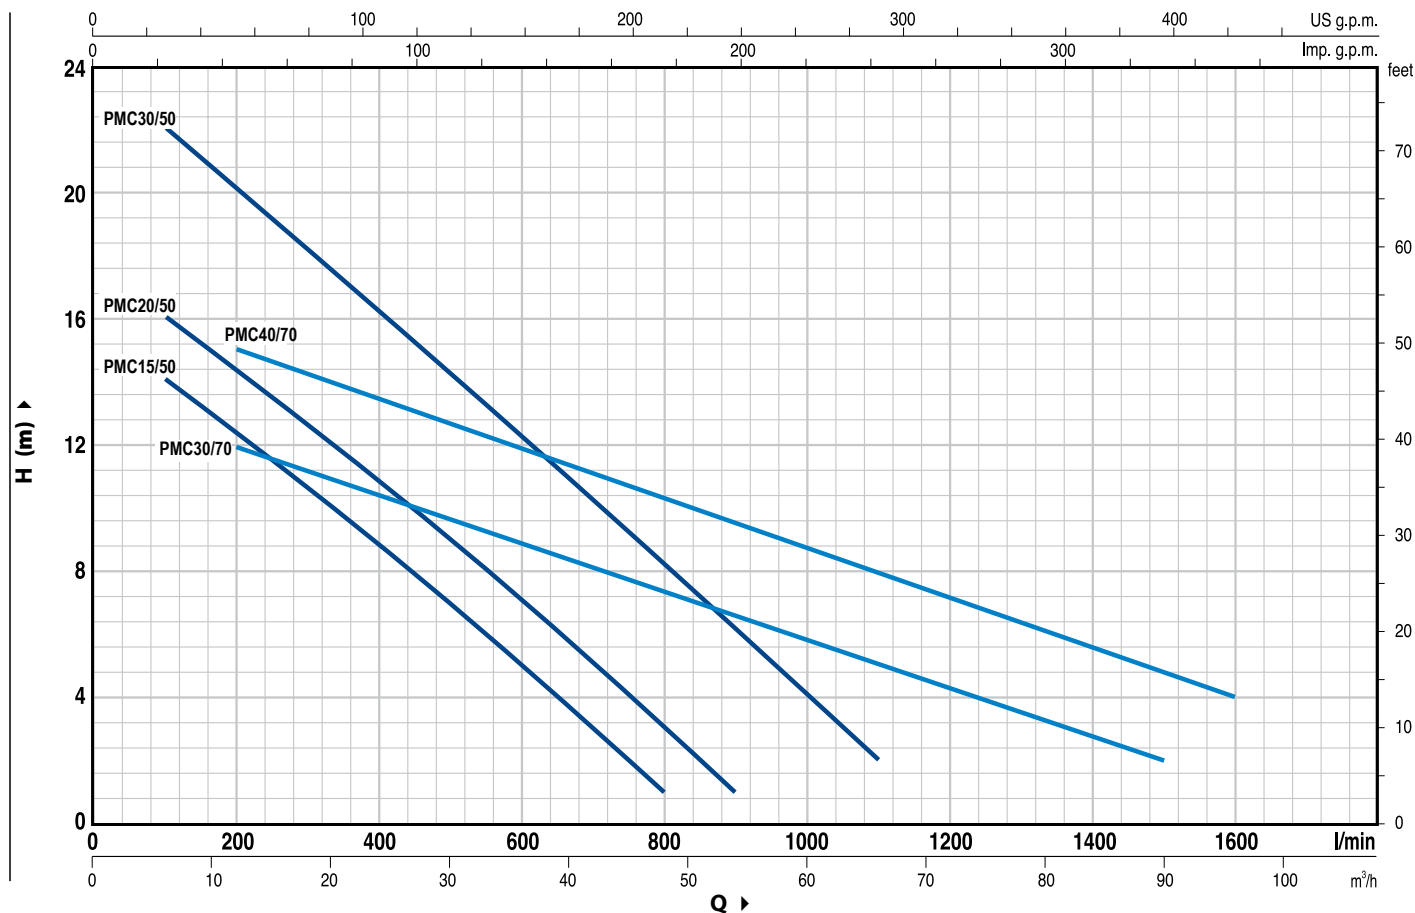

MODELLO TYPE		POTENZA POWER		Q m³/h l/min	H (m)																		
1 ~	3 ~	kW	HP		0	3	6	12	18	24	30	36	42	48	54	60	66	72	84	84	90	96	
PMCm 15/50	PMC 15/50	1.1	1.5	H (m)	16	-	14	12.5	10.5	8.5	7	5	3	1									
PMCm 20/50	PMC 20/50	1.5	2		18	-	16	14	12.5	10.5	9	7	5	3	1								
PMCm 30/50	PMC 30/50	2.2	3		24	-	22	20	18	16	14	12	10	8	6	4	2						
PMCm 30/70	PMC 30/70	2.2	3		14	-	-	12	11.2	10.5	9.7	9	8.2	7.5	6.7	6	5.2	4.5	3.6	3	2		
-	PMC 40/70	3	4		17	-	-	14.9	14.2	13.3	12.6	11.8	11	10.2	9.5	8.6	7.9	7	6.2	5.5	4.8	4	

Q = Portata H = Prevalenza manometrica totale
Q = Flow rate H = Total manometric head

Tolleranza delle curve di prestazione secondo EN ISO 9906 App. A.
Tolerance of the performance curves according to EN ISO 9906 App. A.App. A.